
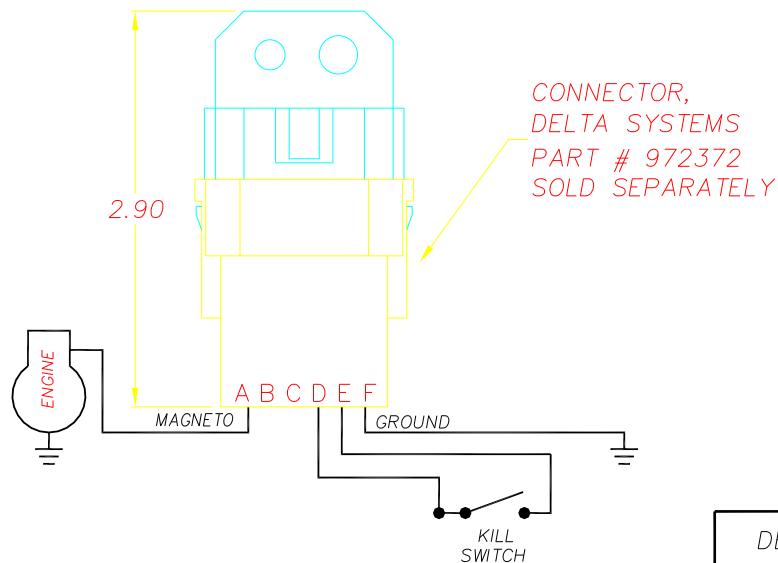


NOTES:

- 1) MAXIMUM OPERATING TEMP.: 180° F
- 2) CONNECTOR SNAPS ONTO HOUSING AND REQUIRES AN EXTRA EFFORT TO REMOVE.
- 3) INSERT PLATED TERMINALS (PACKARD #12040502 OR EQUIVALENT) INTO DESIGNATED LOCATIONS IN THE CONNECTOR PRIOR TO INSTALLING CONNECTOR ON HOUSING.
- 4) MODULE WILL ALLOW ENGINE TO RUN ONLY WHEN KILL SWITCH IS CLOSED.
- 5) CARD EDGE SEALER/LUBRICANT ADDED.
- 6) THIS PRODUCT NOT FOR USE WITH CAPACITOR DISCHARGE IGNITIONS. ENGINE MANUFACTURERS' IGNITIONS VARY. IT IS THE USERS RESPONSIBILITY TO TEST THIS PRODUCT ON ANY SPECIFIC ENGINE.
- 7) THIS PRODUCT COVERED BY ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 4,294,961; 4,369,745; 5,190,019.


REVISIONS		
~	INITIAL RELEASE, CR 1282	02/25/99 JH

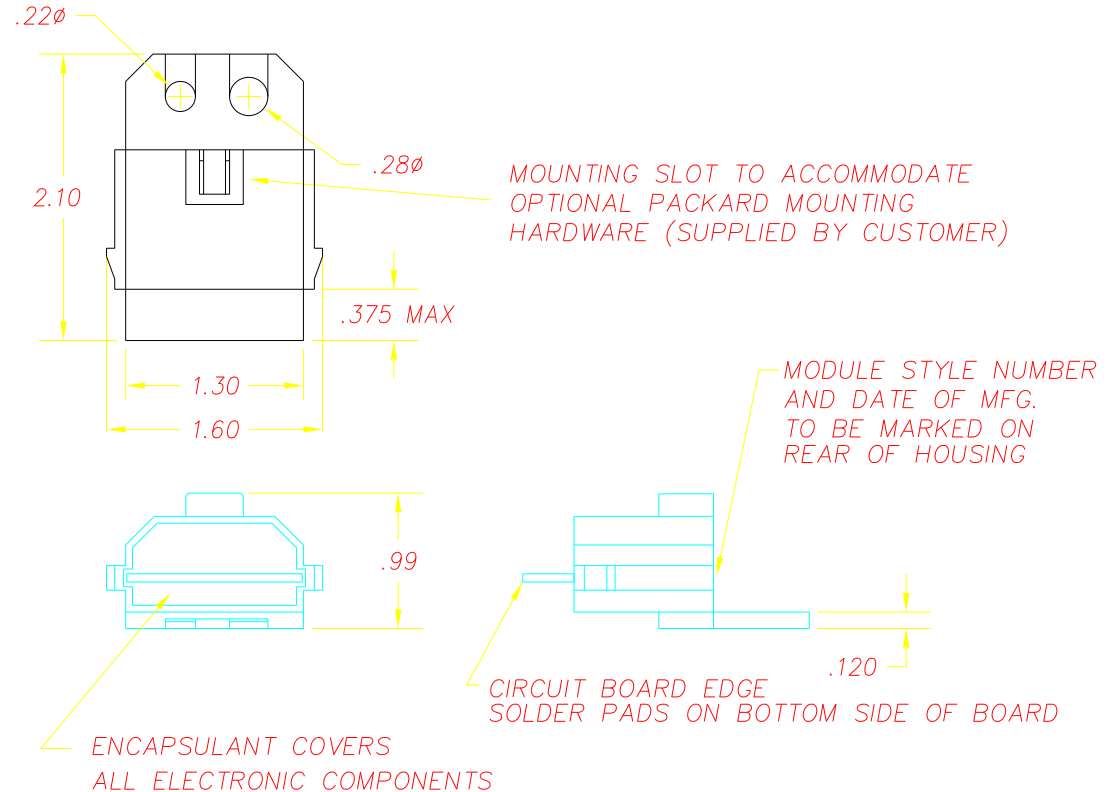

TYPICAL APPLICATION SCHEMATIC

DELTA SYSTEMS, INC. DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE MISAPPLICATION OF ANY PRODUCT		
COMPUTER GENERATED DRAWING - NO MANUAL CHANGES ALLOWED	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: .xx± .02 .xxx± ANG±	DO NOT SCALE DRAWING

DRAWN	DATE
LMM	02/25/99
CHECKED	DATE
JH	02/25/99
MATERIAL	
PLASTIC PARTS	
DELTON™	
FINISH	
PLASTIC PARTS	
BLACK	

		DELTA SYSTEMS INC. STREETSBORO, OHIO 44241	
TITLE: 1251 MODULE			
SIZE: B	DWG. NO. 1251		
SCALE: FULL	PROJECT NO. EX310	REV: ~	