


REVISIONS			
A	ADD DATE CODE INFO, CR 825	06/26/96	TW
B	REVISED PARTIAL STRIP, CR 942	03/12/97	TW
C	STANDARDIZE PRINTS, CN 0608	02/10/03	JH
D	STANDARDIZE OPER. POINT; CN1065	12/22/05	JM

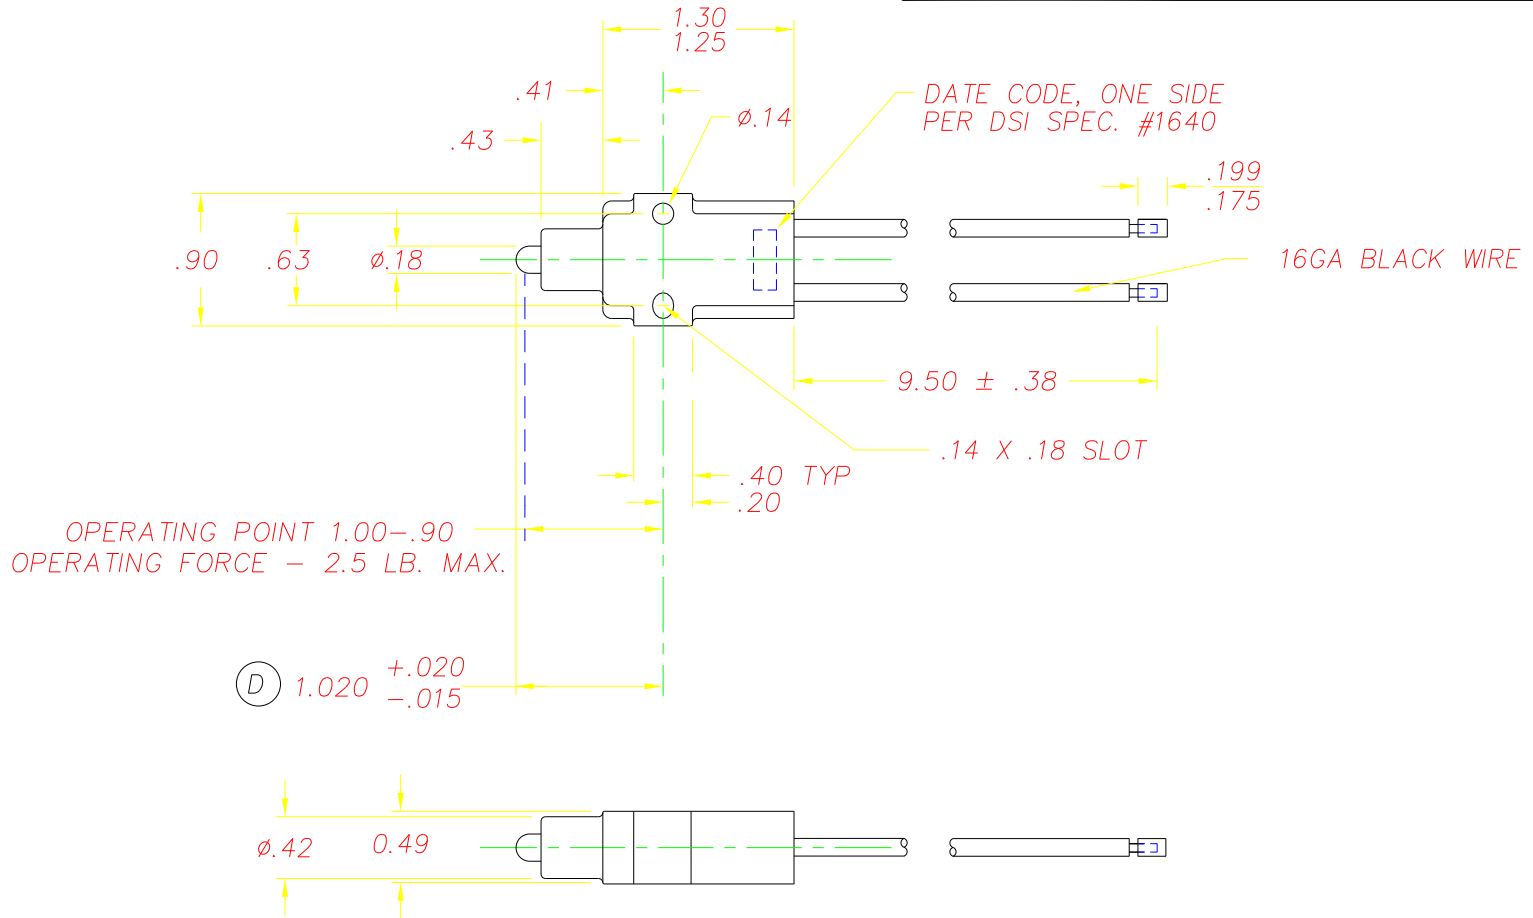

NOTES:

- 1-INITIAL VOLTAGE DROP MEASURED ACROSS SWITCH TERMINALS IS 100 mv. MAX. AT 3 AMPS WITH 12 - 15 VDC APPLIED.
- 2-SWITCH CIRCUIT WHEN OPEN WILL WITHSTAND 500 VOLTS DC WITH A MAX. OF 5ma LEAKAGE (100K OHMS MIN.).
- 3-THE SWITCH AND LEADS WILL WITHSTAND 10" Hg VACUUM WHEN SUBMERGED IN WATER PER DSI 10.02.37.
- 4-SWITCH HOUSING AND PLUNGER ARE CONSTRUCTED OF UV STABILIZED ACETAL COPOLYMER WITH 12% GLASS. COLOR: BLACK.
- 5- ELECTRICAL RATING: 3A@12-14VDC  
LIFE = 100,000 CYCLES RESISTIVE

DELTA SYSTEMS, INC. DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE MISAPPLICATION OF ANY PRODUCT


COMPUTER GENERATED DRAWING - NO MANUAL CHANGES ALLOWED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:

.XX± .02 .XXX± ANG±

DO NOT SCALE DRAWING

DRAWN	DATE
LMM	03/07/96
CHECKED	DATE
TW	03/11/96
MATERIAL	
AS NOTED	
FINISH	
AS NOTED	



**DELTA**  
SYSTEMS INC.  
STREETSBORO, OHIO 44241

TITLE		
UNIVERSAL SWITCH NORMALLY OPEN		
SIZE	DWG. NO.	
B	7080-21	
SCALE	PROJECT NO.	REV
FULL		D