


REVISIONS			
~	INITIAL RELEASE, CR 841	08/21/98	TW
A	ADD CABLE SEAL TO WIRE, CR1193	08/05/98	JH
B	STANDARDIZE PRINTS, CN 0608	02/10/03	JH
C	STANDARDIZE OPER. POINT; CN1065	12/22/05	JM

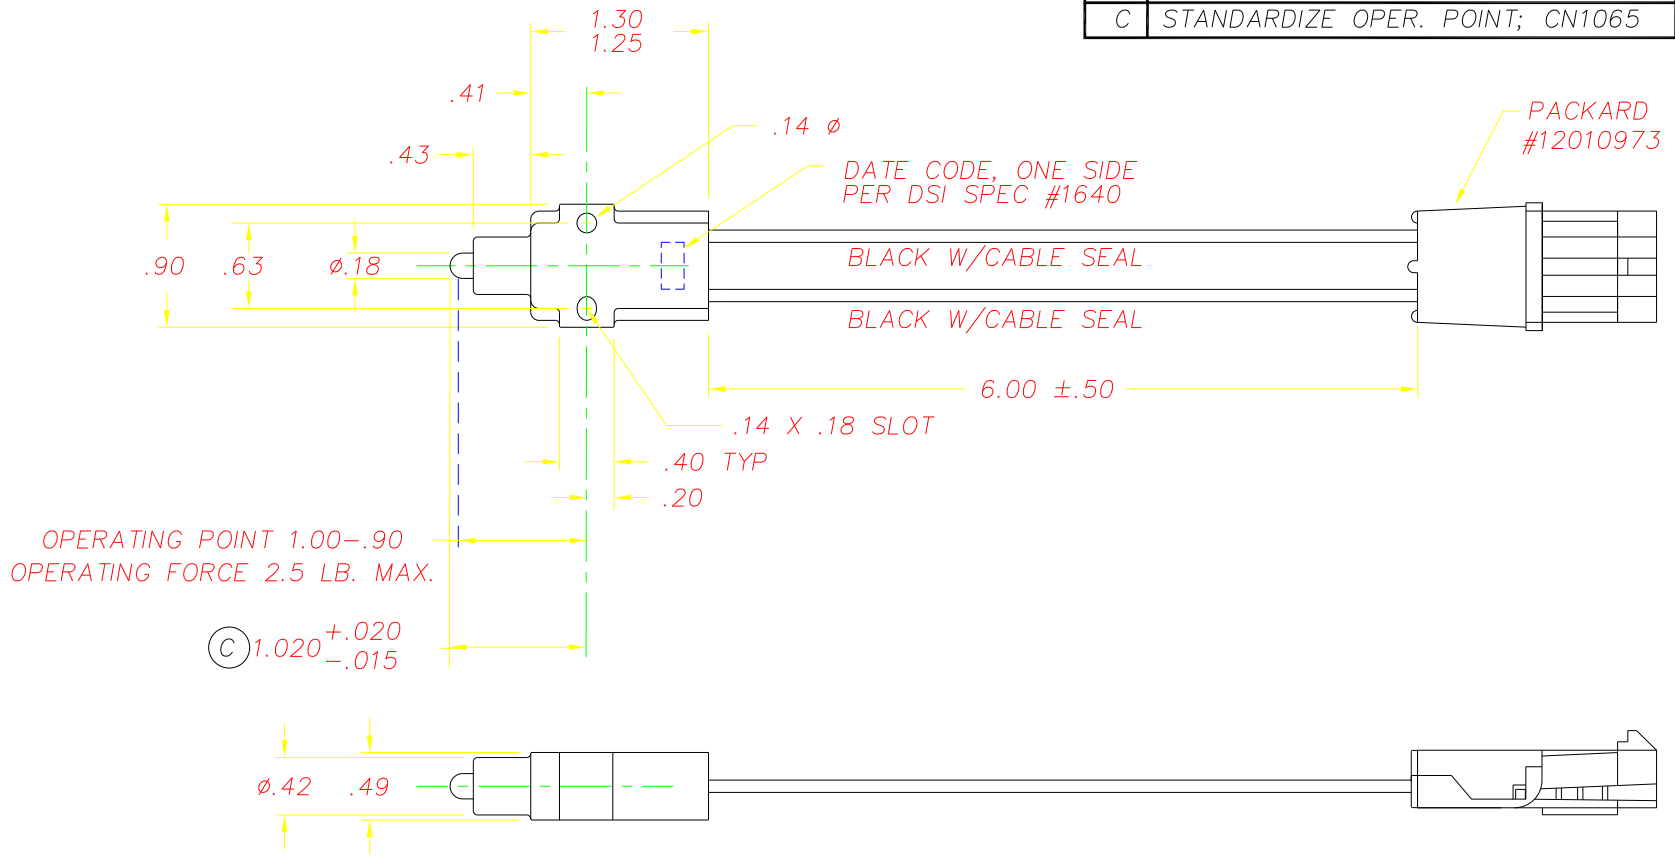

NOTES:

- 1-INITIAL VOLTAGE DROP MEASURED ACROSS TERMINALS IS 100 mv. MAX. AT 3 AMPS WITH 12 - 15 VDC APPLIED.
- 2-SWITCH CIRCUIT WHEN OPEN WILL WITHSTAND 500 VOLTS DC WITH A MAX. OF 5ma LEAKAGE (100K OHMS MIN.).
- 3-THE SWITCH AND LEADS WILL WITHSTAND 10" Hg VACUUM WHEN SUBMERGED IN WATER PER DSI 10.02.327.
- 4-SWITCH HOUSING AND PLUNGER ARE CONSTRUCTED OF UV STABILIZED ACETAL COPOLYMER WITH 12% GLASS. COLOR: BLACK.
- 5- ELECTRICAL RATING: 3A@12-14VDC
LIFE = 100,000 CYCLES RESISTIVE


DELTA SYSTEMS, INC. DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE MISAPPLICATION OF ANY PRODUCT

COMPUTER GENERATED DRAWING - NO MANUAL CHANGES ALLOWED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
.XX± .02 .XXX± ANG±

DO NOT SCALE DRAWING

DRAWN	DATE
LMM	08/21/98
CHECKED	DATE
TW	08/21/98
MATERIAL	
AS NOTED	
FINISH	
AS NOTED	

		DELTA SYSTEMS INC. STREETSBORO, OHIO 44241	
TITLE			
UNIVERSAL SWITCH NORMALLY OPEN			
SIZE	DWG. NO.		
B	7080-25		
SCALE	PROJECT NO.	REV	
FULL	E-312	C	