



REVISIONS			
~	INITIAL RELEASE, CR 1077	01/14/98	JH
A	REVISED CONN. & TERM., CR 1164	07/27/98	JH
B	STANDARDIZE PRINTS, CN 0608	02/10/03	JH
C	STANDARDIZE OPER. POINT; CN1065	12/22/05	JM

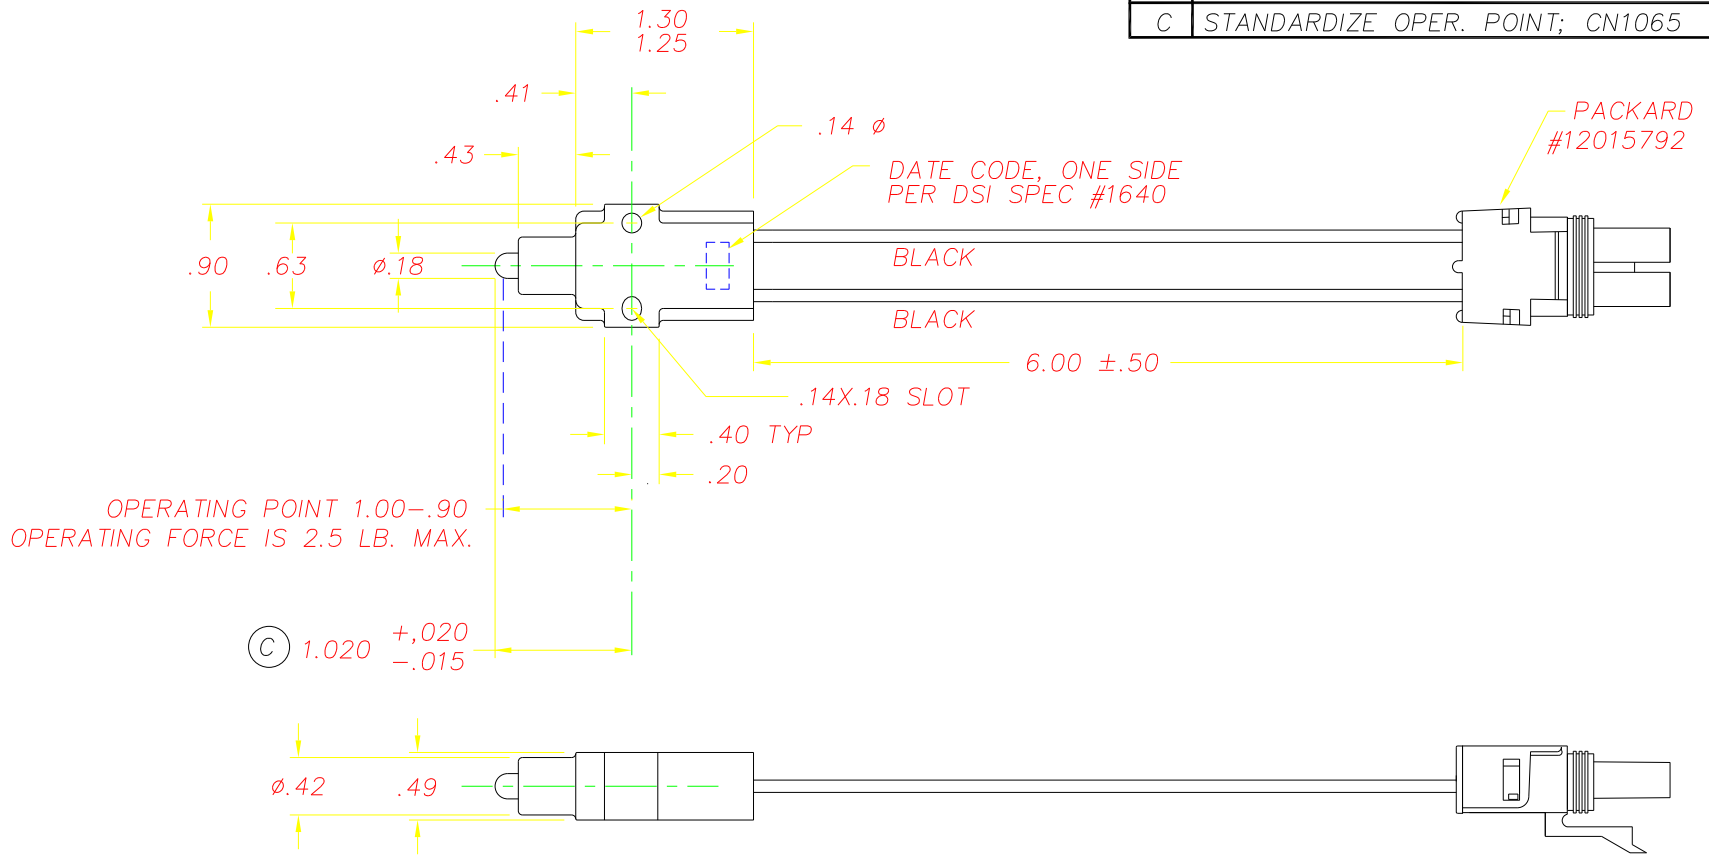

**NOTES:**

- 1-INITIAL VOLTAGE DROP MEASURED ACROSS SWITCH TERMINALS IS 100 mv. MAX. AT 3 AMPS WITH 12 - 15 VDC APPLIED.
- 2-SWITCH CIRCUIT WHEN OPEN WILL WITHSTAND 500 VOLTS DC WITH A MAX. OF 5ma LEAKAGE (100K OHMS MIN.).
- 3-THE SWITCH AND LEADS WILL WITHSTAND 10" Hg VACUUM WHEN SUBMERGED IN WATER PER DSI 10.02.37.
- 4-SWITCH HOUSING AND PLUNGER ARE CONSTRUCTED OF UV STABILIZED ACETAL COPOLYMER WITH 12% GLASS. COLOR: BLACK.
- 5- ELECTRICAL RATING: 3A@12-14VDC LIFE = 100,000 CYCLES RESISTIVE

DELTA SYSTEMS, INC. DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE MISAPPLICATION OF ANY PRODUCT		DRAWN	DATE
		LMM	11/04/97
COMPUTER GENERATED DRAWING - NO MANUAL CHANGES ALLOWED		CHECKED	DATE
		JH	01/14/98
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: .XX± .02 .XXX± ANG±		MATERIAL	
		AS NOTED	
DO NOT SCALE DRAWING		FINISH	
		AS NOTED	

		<b>DELTA</b> SYSTEMS INC. STREETSBORO, OHIO 44241	
UNIVERSAL SWITCH NORMALLY CLOSED		SIZE	DWG. NO.
B		7080-29	
SCALE		PROJECT NO.	REV
FULL		E-312	C