


REVISIONS			
~	INITIAL RELEASE, CR 1446	08/30/01	JH
A	STANDARDIZE PRINTS, CN 0608	02/10/03	JH
B	STANDARDIZE OPER. POINT; CN1065	12/22/05	JM
C	HSG BLACK TO GRAY, CN2151	10/20/09	MEL




NOTES:

- 1-INITIAL VOLTAGE DROP MEASURED ACROSS SWITCH TERMINALS IS 100 mv. MAX. AT 3 AMPS WITH 12 - 15 VDC APPLIED.
- 2-SWITCH CIRCUIT WHEN OPEN WILL WITHSTAND 500 VOLTS DC WITH A MAX. OF 5ma LEAKAGE (100K OHMS MIN.).
- 3-THE SWITCH AND LEADS WILL WITHSTAND 10" Hg VACUUM WHEN SUBMERGED IN WATER PER DSI 10.02.37.
- 4-SWITCH HOUSING AND PLUNGER ARE CONSTRUCTED OF UV STABILIZED ACETAL COPOLYMER WITH 12% GLASS. COLOR: BLACK PLUNGER, GRAY HOUSING
- 5- ELECTRICAL RATING: 3A@12-14VDC  
LIFE = 100,000 CYCLES RESISTIVE

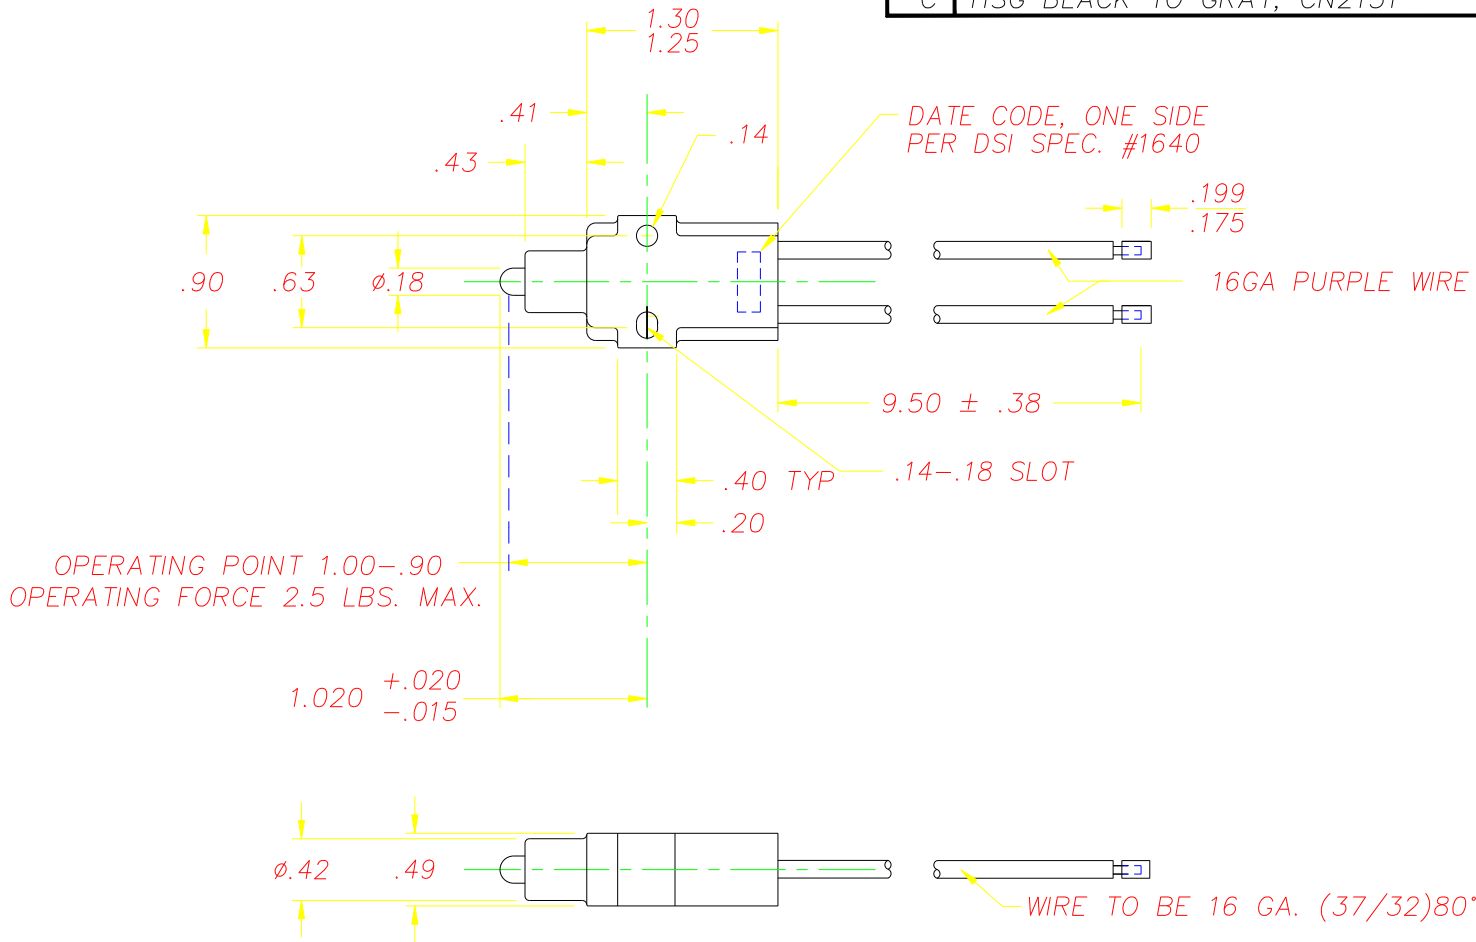

DELTA SYSTEMS, INC. DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE MISAPPLICATION OF ANY PRODUCT		DRAWN	DATE
		LMM	07/25/01
COMPUTER GENERATED DRAWING - NO MANUAL CHANGES ALLOWED		CHECKED	DATE
		MA	07/25/01
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: .XX± .02 .XXX± ANG±		MATERIAL	
		AS NOTED	
DO NOT SCALE DRAWING		FINISH	
		AS NOTED	

		<b>DELTA</b> SYSTEMS INC. STREETSBORO, OHIO 44241	
TITLE			
UNIVERSAL SWITCH NORMALLY CLOSED			
SIZE	B	DWG. NO.	7080-34
SCALE	FULL	PROJECT NO.	REV
			C

