



REVISIONS			
~	INITIAL RELEASE, CR 1479	05/30/02	JH
A	ADD CABLE TIE & UPDATE NOTES	05/14/03	JH
B	REMOVE CABLE TIE, CR 1538	01/14/04	JM
C	STANDARDIZE OPER. POINT; CN1065	12/22/05	JM

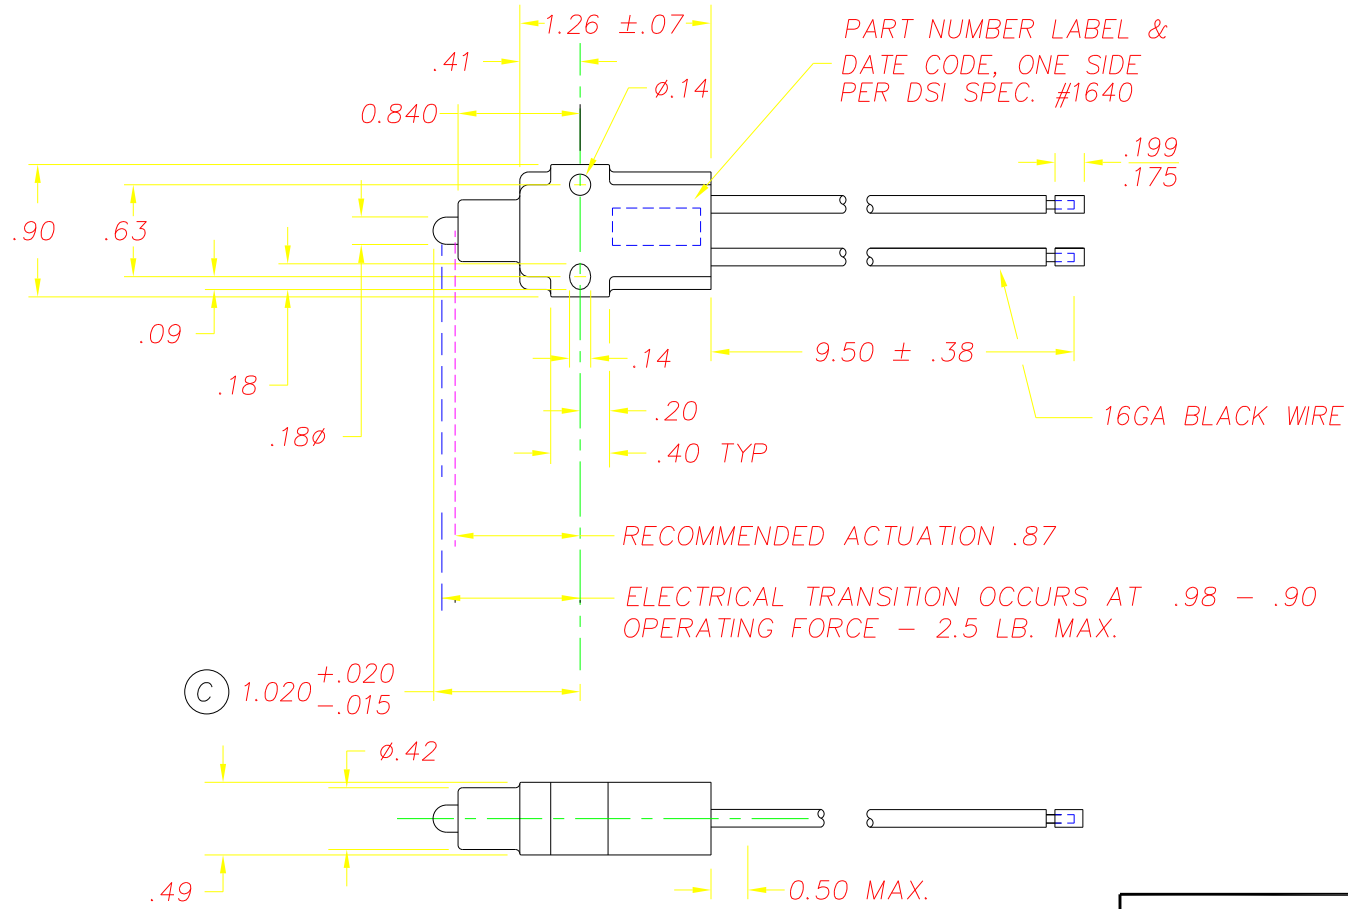

NOTES:

1. WIRE TO BE 16 GA. (37/32)80° PVC INSULATION, CABLE LAY-UP MAY CONSIST OF MORE STRANDS OF FINER WIRE AS LONG AS THE TOTAL CROSS SECTIONAL AREA IS NO LARGER.
2. MATERIAL: SWITCH BODY- UV STABLE, ACETAL COPOLYMER WITH 12% GLASS; BLACK PLUNGER: 0%GLASS FILLED ACETAL; GRAY

DELTA SYSTEMS, INC. DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE MISAPPLICATION OF ANY PRODUCT		DRAWN	DATE
		JLM	05/30/02
COMPUTER GENERATED DRAWING - NO MANUAL CHANGES ALLOWED		CHECKED	DATE
		JH	05/30/02
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: .XX± .02 .XXX± .005 ANG± 1°		MATERIAL AS NOTED	
		FINISH AS NOTED	
DO NOT SCALE DRAWING			

 DELTA SYSTEMS INC. STREETSBORO, OHIO 44241		TITLE	
		UNIVERSAL SWITCH NORMALLY OPEN	
SIZE	B	DWG. NO.	7080-36
SCALE	FULL	PROJECT NO.	REV C