



REVISIONS			
~	INITIAL RELEASE, CR 1507	07/01/03	JH
A	STANDARDIZE OPER. POINT; CN1065	12/22/05	JM

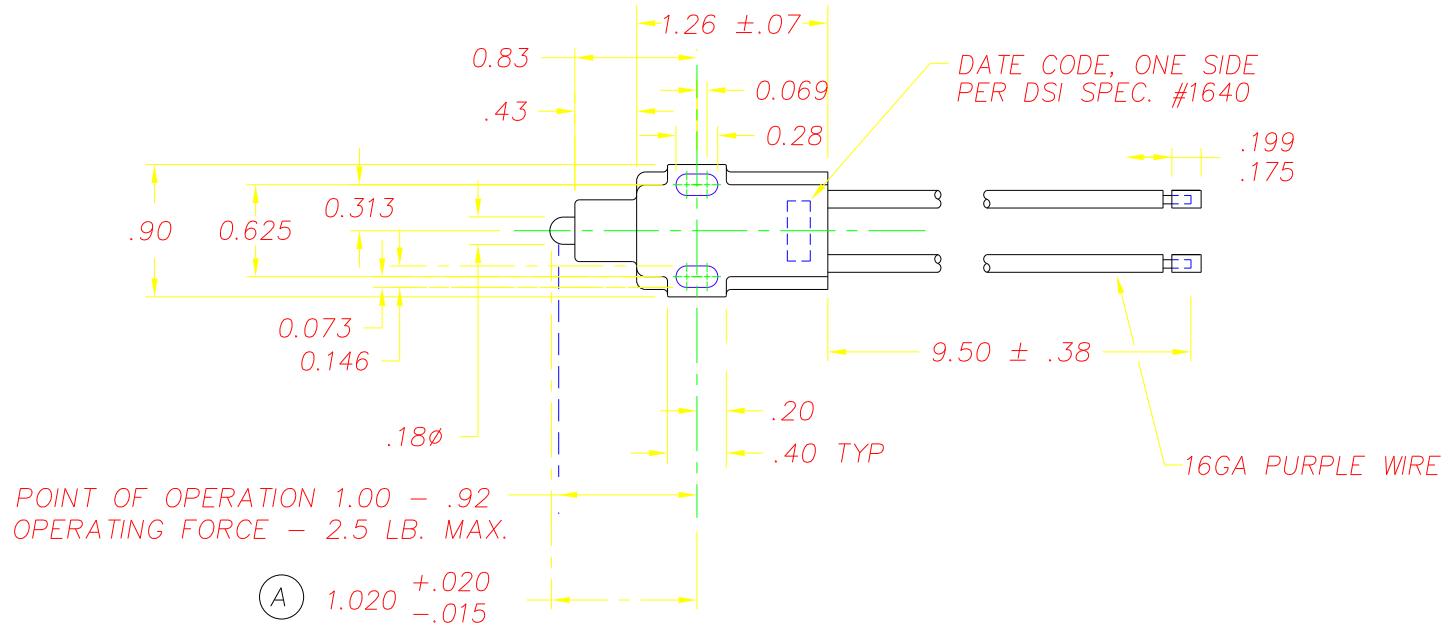


NOTES:

1. WIRE TO BE 16 GA. (37/32)80° PVC INSULATION, CABLE LAY-UP MAY CONSIST OF MORE STRANDS OF FINER WIRE AS LONG AS THE TOTAL CROSS SECTIONAL AREA IS NO LARGER.
2. MATERIAL: SWITCH - UV STABLE, ACETAL COPOLYMER WITH 12% GLASS GRAY HOUSING, BLACK PLUNGER
3. ELECTRICAL LIFE:
100,000 CYCLES @ 3A, 12VDC RESISTIVE LOAD.

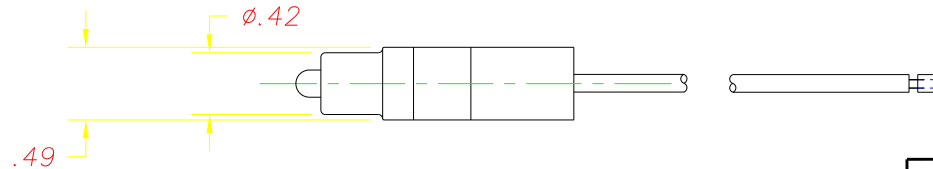

DELTA SYSTEMS, INC. DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE MISAPPLICATION OF ANY PRODUCT		DRAWN JLM	DATE 11/04/02
		CHECKED ML	DATE 11/06/02
		MATERIAL AS NOTED	
		FINISH AS NOTED	
COMPUTER GENERATED DRAWING - NO MANUAL CHANGES ALLOWED	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: .XX± .02 .XXX± .005 ANG± 1°		
	DO NOT SCALE DRAWING		

		DELTA SYSTEMS INC. STREETSBORO, OHIO 44241	
TITLE UNIVERSAL SWITCH NORMALLY CLOSED			
SIZE B	DWG. NO. 7080-38		
SCALE FULL	PROJECT NO. EX-312	REV A	