



NOTES:


- 1) MAXIMUM OPERATING TEMP.: 180° F
- 2) CONNECTOR SNAPS ONTO HOUSING AND REQUIRES AN EXTRA EFFORT TO REMOVE.
- 3) INSERT PLATED TERMINALS (PACKARD #12040502 OR EQUIVALENT) INTO DESIGNATED LOCATIONS IN THE CONNECTOR PRIOR TO INSTALLING CONNECTOR ON HOUSING.
- 4) MODULE WILL ALLOW ENGINE TO RUN ONLY WHEN KILL SWITCH IS CLOSED.
- 5) CARD EDGE SEALER/LUBRICANT ADDED.
- 6) ENGINE MANUFACTURERS' IGNITIONS VARY. IT IS THE USERS RESPONSIBILITY TO TEST THIS PRODUCT ON ANY SPECIFIC ENGINE.
- 7) THIS PRODUCT COVERED BY ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 4,294,327; 4,369,745; 5,190,019.

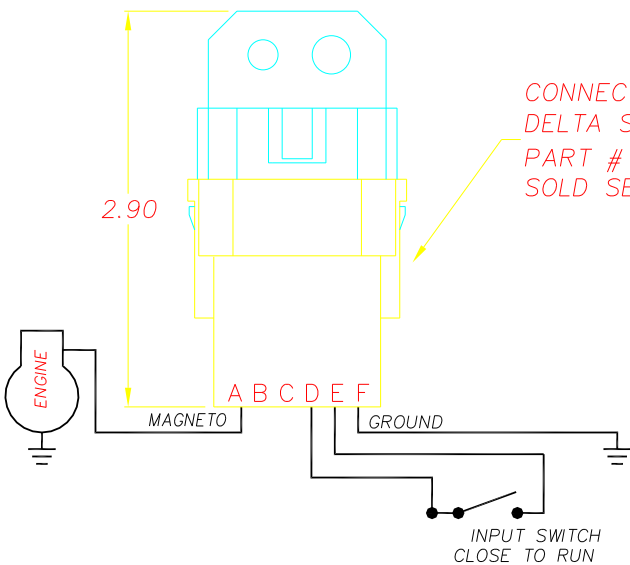

TYPICAL APPLICATION SCHEMATIC

REVISIONS			
~	INITIAL RELEASE, CR 1345	11/30/99	ML
A	RE-RELEASE AS SMT CR 1553	06/07/04	JH

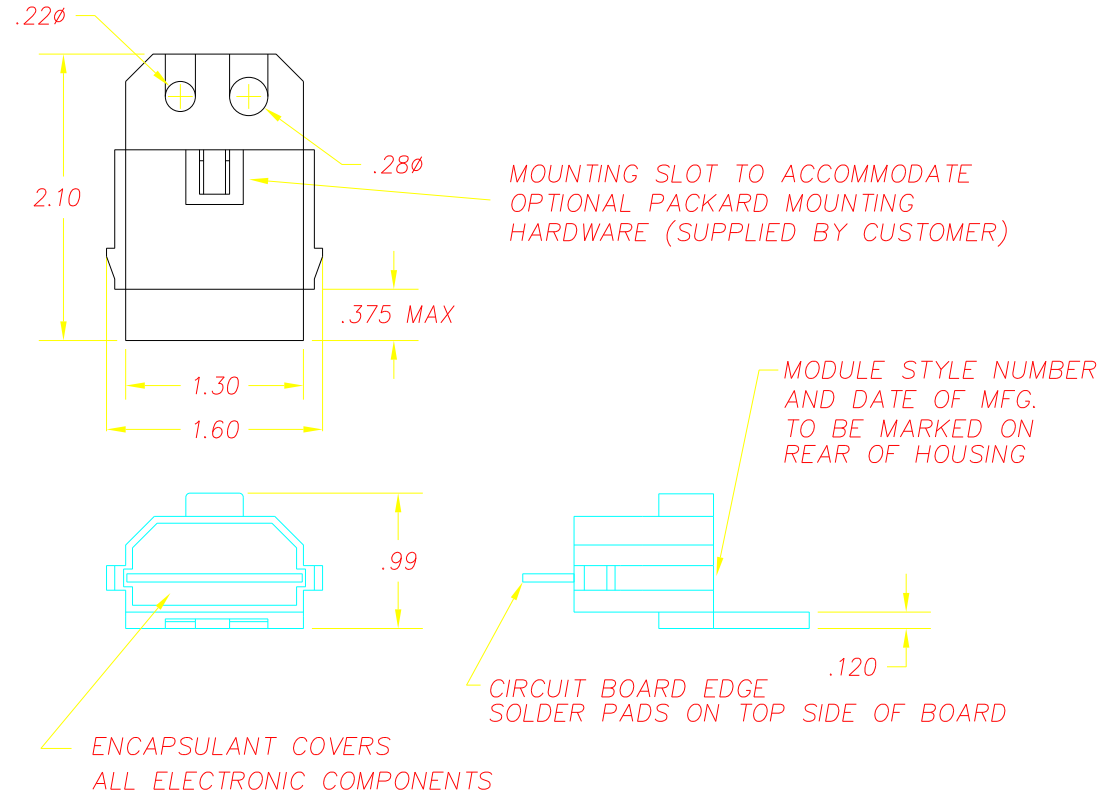

DELTA SYSTEMS, INC. DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE MISAPPLICATION OF ANY PRODUCT		DRAWN	DATE	 DELTA SYSTEMS INC. STREETSBORO, OHIO 44241
		LMM	11/30/99	
COMPUTER GENERATED DRAWING - NO MANUAL CHANGES ALLOWED		CHECKED	DATE	TITLE
		ML	11/30/99	1252 MODULE
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: .xx± .02 .xxx± ANG±		MATERIAL		SIZE
		PLASTIC PARTS DELTON™		B
DO NOT SCALE DRAWING		FINISH		DWG. NO.
		PLASTIC PARTS BLACK		1252
		SCALE		PROJECT NO.
		FULL		EX310
		REV		A